



Ultimate solution for increased oil removal capacity

Eaton's ABSORPTION INSERT filter elements are suitable for oil and gel removal in metal cleaning, paint, coating and e-coating applications and many more.

ABSORPTION INSERT filter elements combined with standard filter bags and a stainless steel charging ring provide the ultimate solution for increased dirt and oil removal capacity. The ABSORPTION INSERT filter element fits in ACCUGAF™, DURAGAF™, LOFCLEAR™ 100 (except LCR-130), Monofilament, Multifilament, SENTINEL®, SNAP-RING® and UNIBAG® filter bags.

Features and Benefits

- The ABSORPTION INSERT filter element is a hollow pillow placed inside a standard filter bag (size 02)
- 1.9 lbs (850 g) highly efficient melt-blown polypropylene 'spaghetti' fibers virtually traps two times its own weight
- Perforated spunbond cover layer keep all polypropylene 'spaghetti' fibers perfectly together
- Extruded polypropylene core stabilizes the filter element and allows a homogeneous and constant liquid flow from the inside to the outside
- Stainless steel charging ring directs the liquid flow directly into the center core preventing the filter element from collapsing
- Material is free from silicone and crater-forming substances¹

Filter Specifications

Material
Melt-blown polypropylene

Cover layer
Spunbond polypropylene

Inner core
Extruded polypropylene

Dimensions/Parameters

Size
02: Ø 7 x 32" L (180 x 810 mm)

Max. operating temperature
Polypropylene: 194 °F (90 °C)

Max. differential pressure
7.3 psi (0.5 bar)

Max. flow rate²
02: 44 GPM (10 m³/h)




Powering Business Worldwide

ABSORPTION INSERT Filter Element Range



'Spaghetti' fiber matrix

Ordering Information

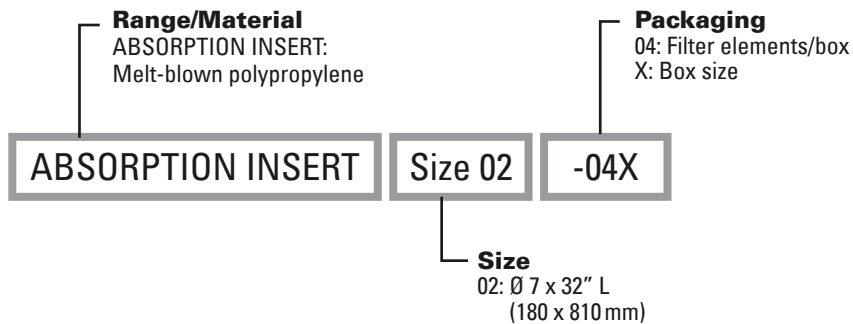

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C)

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Internormen Product Line
Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

Begerow Product Line
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore
4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil
Av. Julia Gaioli, 474 – Bonsucesso
07251-500 – Guarulhos, Brazil
Tel: +55 11 2465-8822

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-FTB-13
08-2014