

- Sizes 1- 1/2" to 8"
- Iron
- Threaded or Flanged

FEATURES

- Hand removable cover
- Drain plug
- Machined basket seat
- Perforated or mesh 316 stainless steel basket

OPTIONS:

- Basket perforations from 1/32" to 1/2"
- Basket mesh from 20 to 400
- Monel baskets
- Vent valves
- Drain valves
- Gauge/vent taps 1/4" NPT
- Magnetic basket inserts
- · Pressure differential gauges and switches

The Eaton Model 30R is a high-quality, low cost simplex basket strainer—perfect for cost sensitive applications.

Whereas the cost of the Model 30R is low, its design incorporates many features found only on more expensive units, including machined basket seats to protect against bypass, ensuring all of the flow is strained. The cover of the Model 30R is a clamp type, and is hand removable

without the need for tools. This makes access to the basket quick and easy for cleanings or changeouts and every size strainer comes standard with a drain plug.

The Model 30R is the best choice simplex strainer for low or moderate pressure applications such as swimming pools, cooling towers, and large air conditioning installations.

Selection Chart


Size	Material	End Connections	Seals	Pressure Rating
1-1/2" to 3"	Iron	Threaded	Buna-N	200 psi at 100 °F
1-1/2" to 8"	Iron	Flanged 125#	Buna-N	200 psi at 100 °F

C_V Factors*

Size	Value	Size	Value
1-1/2"	58	4"	240
2"	90	6"	370
2-1/2"	140	8"	600
3"	200		

^{*} For water with clean, perforated basket



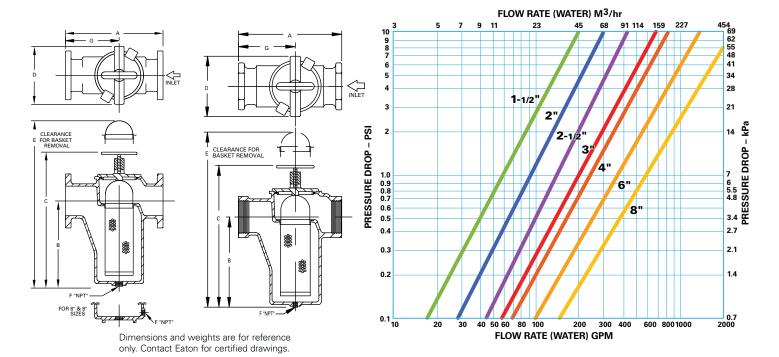

Dimensions (in/mm) Flanged

Pipe Size	А	В	С	D	E	F	G	Dry Wt (lb / kg)
1-1/2	7.75 / <mark>197</mark>	6.50 / <mark>165</mark>	10.63 / <mark>270</mark>	6.00 / 152	14.88 / <mark>378</mark>	3/4	4.44 / 113	12 / 5.5
2	9.63 / <mark>245</mark>	7.50 / 191	11.63 / 295	7.50 / 191	17.38 / 441	1-1/4	5.63 / 143	27 / 12.3
2-1/2	11.00 / 279	9.13 / <mark>232</mark>	15.25 / <mark>387</mark>	8.00 / <mark>203</mark>	22.38 / 568	1-1/4	5.88 / 149	45 / <mark>20.5</mark>
3	11.88 / 302	9.13 / 232	15.25 / <mark>387</mark>	8.00 / <mark>203</mark>	22.38 / 568	1-1/4	6.50 / <mark>165</mark>	59 / <mark>26.6</mark>
4	13.75 / <mark>349</mark>	9.63 / <mark>245</mark>	16.63 / <mark>422</mark>	9.25 / <mark>235</mark>	30.00 / 762	1-1/2	8.44 / <mark>214</mark>	71 / 32.2
6	17.50 / <mark>445</mark>	12.38 / <mark>315</mark>	26.13 / 664	14.75 / <mark>375</mark>	35.00 / 889	2	10.31 / 262	150 / 68.1
8	23.63 / 600	17.75 / <mark>451</mark>	32.63 / 829	14.75 / 375	48.00 / 1219	2	14.50 / 368	230 / 104.3

Dimensions (in/mm) Threaded

Pipe Size	А	В	С	D	E	F	G	Dry Wt (lb / kg)
1-1/2	7.00 / <mark>178</mark>	6.50 / <mark>165</mark>	10.63 / <mark>270</mark>	6.00 / <mark>152</mark>	14.88 / <mark>378</mark>	³ / ₄ / <mark>20</mark>	3.88 / 99	7 / 3.2
2	8.50 / <mark>216</mark>	7.50 / <mark>191</mark>	11.63 / <mark>295</mark>	7.50 / 191	17.38 / 441	1-1/4 / 32	4.81 / 122	20 / 9.1
2-1/2	11.50 / <mark>292</mark>	9.13 / 232	15.25 / <mark>387</mark>	8.00 / <mark>203</mark>	22.38 / 568	1-1/4 / 32	6.00 / 152	34 / 15.5
3	11.50 / <mark>292</mark>	9.13 / <mark>232</mark>	15.25 / 387	8.00 / <mark>203</mark>	22.63 / 575	1-1/4 / 32	6.00 / 152	34 / 15.5

Eaton North America — HQ

44 Apple Street, Tinton Falls, NJ 07724

Toll Free: 800 656-3344 (North America only)

Voice: +1 732 212-4700 Fax: 952 906-3706

Eaton Brazil

Voice: +55 11 2465 8822

Eaton China

Voice: +86-21 5200 0422

Eator

Europe/Africa/Middle East

Voice: +49-2486-809-0

Eaton Singapore

Voice: +65 6825 1668

©2013 Eaton Corporation. All Rights Reserved. All trademarks and registered trademarks are the property of their respective owners. Litho USA, All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

For more information, e-mail us at filtration@eaton.com

Visit us online at <u>eaton.com/filtration</u> for a complete list of Eaton's filtration products.



